



Product Details

- Tools securely attach by retractable braided stainless steel cables
- Large surface area for custom branding/signage; optional Bike Fixation branding as shown is available by request
- Designed to directly interface with all three Bike Fixation High Security manual pumps and Wheel Chock attachments (sold separately)
- Long hose provides wide range of motion without touching the ground
- Impact and UV resistant front plate won't show wear and tear from pedal strikes
- ADA-compliant design

Specifications							
Model #	Description	Type of Mount	Weight	Length	Width	Height	Space Requirement
26347C	Powder Coat	Flange Mount	84 lbs.	10"	10"	55"	See Back
26347G	Galvanized	Flange Mount	84 lbs.	10"	10"	55"	See Back
26347S	Stainless Steel	Flange Mount	84 lbs.	10"	10"	55"	See Back


Our Bike Fixation representatives can assist with custom layout and spacing to meet your room dimensions and desired bike capacity.



Deluxe Public Work Stand

Recommended Spacing

- Minimum of 41" from side of Deluxe Public Work Stand to wall or other
- Minimum of 14" from back of Deluxe Public Work Stand to wall
- Minimum of 60" from an adjoining street or cycle path

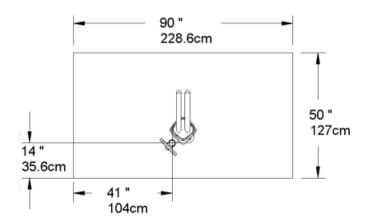

Tools Included:



- Philips & standard screwdrivers
- Steel core tire levers (2)
- Headset/pedal wrench
- 8/10mm cone wrench
- 9/11mm cone wrench
- Torx T-25
- Hex key set





Standard Colors



Proudly Brought to You By:



0800 785 744

rtl.co.nz

Downloadable product resources available online:









Bike Fixation by Saris

800.783.7257

www.bikefixation.com