


## PUBLIC WORK STAND

The Public Work Stand puts the tools where the people need them – on the trails, near the streets and in the bike rooms. With nine common bicycle tools permanently tethered to a bike holder and designed to be placed either inside or outside, the Public Work Stand will meet the spur-of-the-moment maintenance and repair needs that keep riders on their ride.







- Universal bike mounting hang by seat or top tube
- Nine common bicycle tools tethered by stainless steel aircraft cable
- Unique I-beam design eliminates possibility of locking a bike to the station
- ADA-compliant design
- QR code link to maintenance instructions for viewing from smart phone
- Installation hardware included

Specifications							
Model #	Description	Type of Mount	Weight	Length	Width	Height	Space Requirement
26302C	Powder Coat	Flange Mount	43 lbs.	8.5″	16"	49.5"	See Back
26302G	Galvanized	Flange Mount	43 lbs.	8.5″	16"	49.5"	See Back
26302S	Stainless Steel	Flange Mount	43 lbs.	8.5″	16"	49.5"	See Back

Our Bike Fixation representatives can assist with custom layout and spacing to meet your room dimensions and desired bike capacity.




## **Public Work Stand**

## **Recommended Spacing**


Site Layout:

- Minimum of 48" from side of Public Work Stand to wall or other objects
- Minimum of 12" from back of Public Work Stand to wall
- Minimum of 6" between Public Work Stand and Cycle Air
- Minimum of 60" from perpendicular street
- Minimum of 96" from parallel street

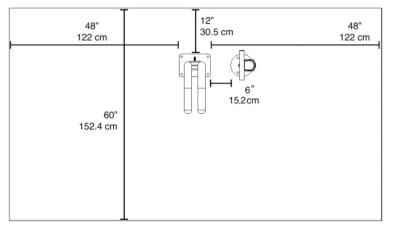




- Philips & standard screwdrivers
- Steel core tire levers (2)
- Headset/pedal wrench
- 8/10mm cone wrench
- 9/11mm cone wrench
- Torx T-25
- Hex key set

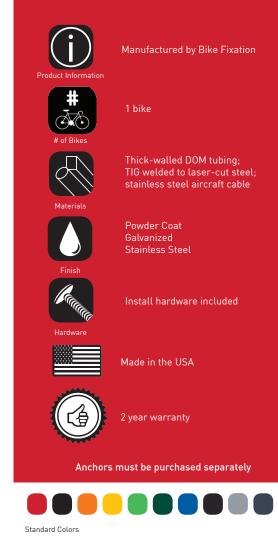

## **Product Dimensions**





Downloadable product resources available online:





Bike Fixation by Saris

800.783.7257

www.bikefixation.com

CAD Files S

1)

SketchUp Files Written Specs

Photos